


DATE		REV	DESCRIPTION	AUTHOR	CHECKED BY	APPROVED
10/03/17		A	INITIAL RELEASE	EW	LS	JT
10/6/17		B	VENDOR P/N CORRECTED FROM L777TSBH25POLRM8 TO L777TSBH25POL2RM8. REFERENCES TO ES50245 REMOVED FROM MODEL OF ES50235.	PM	LS	JT
02/13/18		C	ADDED -2; CHANGED -1 DESC. WAS D-SUB RECEPTACLE.	EW	LS	JT

ACCEPTED VENDORS:
MOUSER ELECTRONICS
1000 NORTH MAIN STREET
MANSFIELD TX 76063
(800) 346-6873



VENDOR P/N: L777TSBH25POL2RM8

MANUFACTURER:
AMPHENOL COMMERCIAL PRODUCTS

TYPE: D-SUB
RATINGS MET: IP66/68
POSITIONS: 25
SHELL SIZE: 3B
CONTACT PLATING: GOLD
VOLTAGE RATING: 600V
CURRENT RATING: 5A
SHELL MATERIAL: STEEL
SHELL COATING: NICKEL

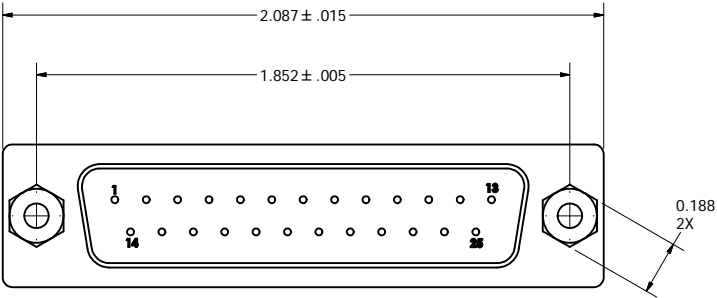

-1 CONNECTOR

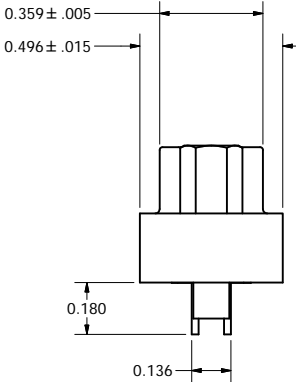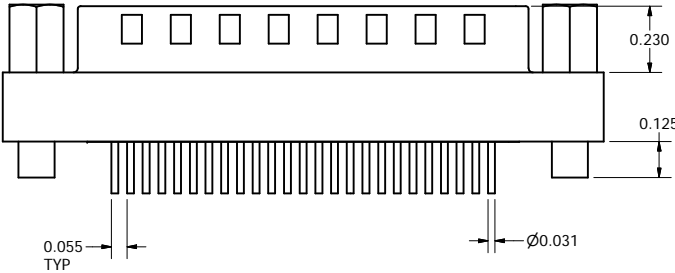

NOTE:
This drawing defines the overall geometry and performance specifications of the part/assembly, and constitutes the acceptance criteria thereof. Only the item(s) described in this document procured from the vendor and/or manufacturer listed hereon are approved for use. A substitute item shall not be used without prior approval. Conformance of hardware to these requirements is acceptable in lieu of vendor and/or manufacturer documentation.

~CONFIDENTIAL INFORMATION~
THE INFORMATION AND DATA CONTAINED HEREIN IS PROPRIETARY AND IS SUBMITTED IN CONFIDENCE; AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR ANY PURPOSE WHATSOEVER WITHOUT THE PRIOR WRITTEN PERMISSION OF PARAVION TECHNOLOGY, INC.

PROTO

Paravion® Inc.		TITLE		DRAWING NUMBER	
D-SUB RECEPTACLE		ES50235			
DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED:	DRAWN BY	CHK'D BY	APRVD. BY	DATE	REV
.X = ± .1 .XX = ± .05 .XXX = ± .010 ANGLES = ± 1°	EW	LS	JT	10/2/17	C
THREADS: INTERNAL CLASS 2B EXTERNAL CLASS 2A	DO NOT SCALE DRAWING		SHEET		1 OF 2
3RD ANGLE PROJECTION		©2017 PARAVION TECH. INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY INC.			




ACCEPTED VENDORS:
3T SYSTEMS
12830 MIRABEAU PKWY
SPOKANE VALLEY, WA 99216
(509) 535-8280


MANUF P/N: 5205207-1

MANUFACTURER:
TE CONNECTIVITY

-2 DB25 RECEPTACLE

TYPE: D-SUB
COMPLIES WITH: AMP SPEC. 108-40005
POSITIONS: 25
SHELL SIZE: 3
SHELL MATERIAL: STEEL
SHELL COATING: ZINC PLATED, YELLOW CHROMATE COATING
INSERT MATERIAL: GLASS-FILLED PBT OR GLASS-FILLED NYLON,
UL94V-0 RATED

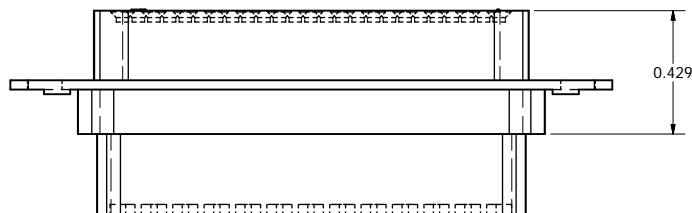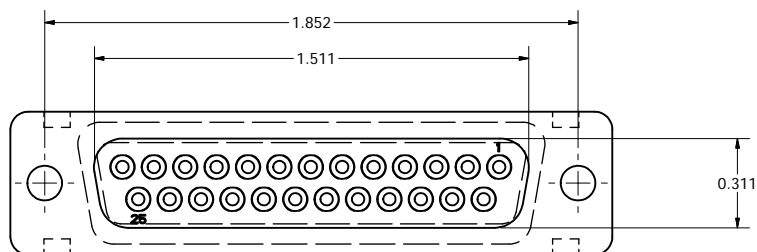

<div>Paravion® Technology Inc.</div>		TITLE				DRAWING NUMBER		
		D-SUB RECEPTACLE				ES50235		
<div>DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED: X = ± .1 .XX = ± .05 .XXX = ± .010 ANGLES = ± 1°</div>		DRAWN BY	CHK'D BY	APRVD. BY	DATE	REV	ECO	
		EW	LS	JT	10/2/17	C		
		<div>DO NOT SCALE DRAWING</div>					SHEET	
		<div>©2017 PARAVION TECH. INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY INC.</div>					2 OF 2	
TO	THREADS: INTERNAL CLASS 2B EXTERNAL CLASS 2A		3RD ANGLE PROJECTION					